

20•20MW 20•20W

COMPANION HOLDING CABINET WITH ROLL-IN CART



MODEL 20•20MW
(SHOWN WITH RIGHT-HAND DOOR)



- HALO HEAT . . . a controlled, uniform heat source that gently surrounds food to provide a better appearance, taste, and longer holding life.
- Uses one-third to one-half the energy of conventional holding equipment.
- Motionless air inside cabinet prevents transfer of flavors, retains more product moisture, and preserves color.
- Close temperature tolerance, along with even heat distribution, maintains an ideal serving temperature throughout the cabinet.
- Roll-In Pan Cart (trolley) is designed for maximum capacity and is completely interchangeable with the CombiTherm® Combi Oven/Steamer model 20•20 and the Alto-Shaam® QuickChiller™ QC-100.
- Available in a stationary or mobile cabinet design.



Insulated Halo Heat companion holding cabinet features 20 gauge stainless steel construction. The cabinet is controlled with one (1) ON/OFF power switch and an adjustable, electronic thermostat which includes a heat indicator light, temperature set button, and temperature increase and decrease buttons. The thermostat has a range of 60° to 200°F (16° to 93°C) and includes a digital display indicating the air temperature within the cabinet. The door has a heavy duty rotary handle with standard left-hand hinging.

Each holding cabinet includes one (1) Roll-In Pan Cart (trolley) which features removable handle, pan support rails to hold full-size pans, and ten (10) wire shelves for sheet pans. Cart includes four (4) swivel casters with brake.

- MODEL 20•20MW:** Mobile holding cabinet supported by four (4) heavy duty casters
- MODEL 20•20W:** Stationary holding cabinet supported by four (4) heavy equipment legs

FACTORY INSTALLED OPTIONS

- Left-hand door swing is standard.
 - ➔ Specify right-hand door as a special order.



ANSI/NSF 4



MODEL 20•20W




ROLL-IN PAN CART



ROLL-IN PLATE CART

COMPANION HOLDING CABINET 20•20MW 20•20W

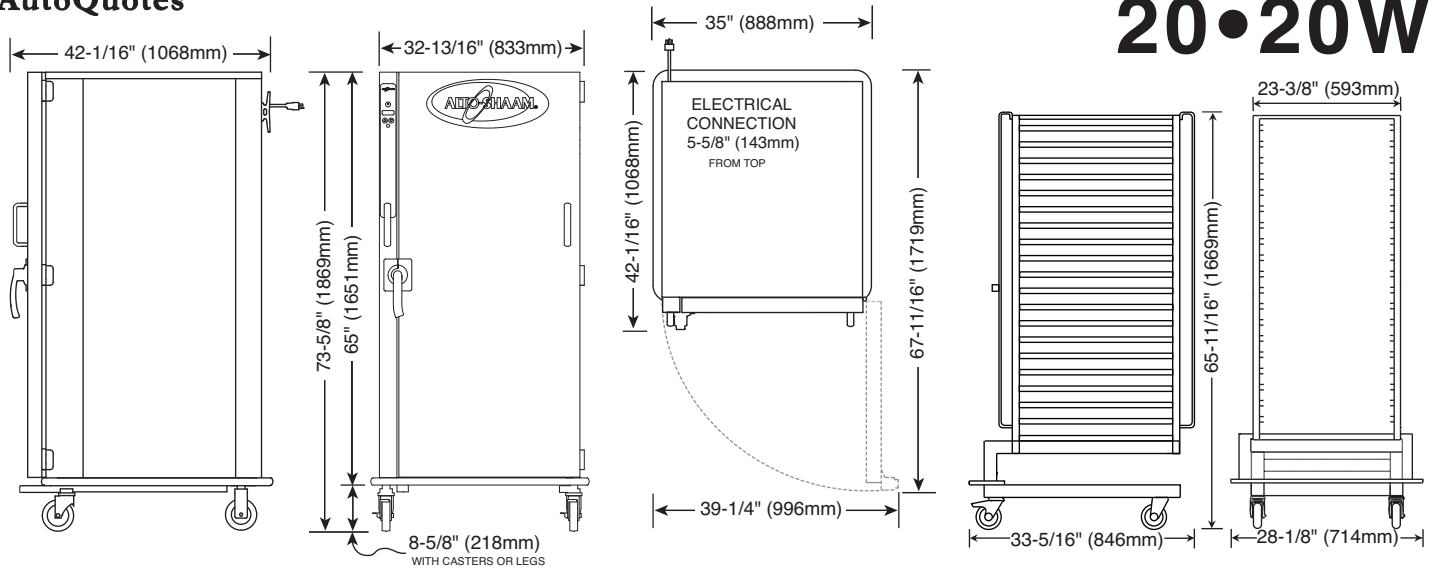


DIMENSIONS: (H x W x D)	
EXTERIOR:	73-5/8" x 35" x 42-1/16" (1869mm x 888mm x 1068mm)
ROLL-IN PAN CART: (TROLLEY)	
All stainless steel construction	
-Twenty (20) pan support rail positions	
2-5/8" (67mm) vertical spacing between rails	
21-3/16" (538mm) horizontal width between rails	
-Four (4) casters (swivel with brake)	
-One (1) removable push handle	
-Ten (10) stainless steel wire shelves	

WEIGHT	20•20MW	20•20W
NET:	495 lb (225 kg)	495 lb (225 kg) EST.
SHIP:	730 lb (331 kg)	730 lb (331 kg) EST.
CRATE DIMENSIONS: (H x W x D)		
80" x 44" x 50" (2032mm x 1118mm x 1270mm)		

INSTALLATION REQUIREMENTS
<ul style="list-style-type: none"> • Appliance must be installed level. • The appliance must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

CLEARANCE REQUIREMENTS
3" (76mm) at the back, 2" (51mm) at the top, and 1" (25mm) at both sides

ELECTRICAL					
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG
208-240 (UL)	1	50/60	17.1	4.1	 NEMA L6-30P 30A-250V Plug
208	1	50/60	14.8	3.1	
240	1	50/60	17.1	4.1	
230	1	50/60	17.0	3.9	NO CORD OR PLUG

PRODUCT \ PAN CAPACITY	
480 lbs (218 kg) MAXIMUM	
VOLUME MAXIMUM: 300 QUARTS (284 LITERS)	
FULL-SIZE PANS: Forty (40) 20" x 12" x 2-1/2" MAXIMUM	
GN 1/1: Forty (40) (530mm x 325mm x 65mm)	
GN 2/1: Twenty (20) (650mm x 530mm x 65mm)	
FULL-SIZE SHEET PANS: Ten (10) 18" x 26" x 1" (20 with added shelves)	
Roll-in Pan Rack (UN-27970)	
—Ten (10) stainless steel wire shelves	
—Twenty (20) pan support rail positions	
2-5/8" (67mm) vertical spacing between rails	
21-3/16" (538mm) horizontal width between rails	

OPTIONS & ACCESSORIES	
<input type="checkbox"/> Preheat Sealing Strip	5007925
<input type="checkbox"/> Roll-In Pan Cart (fits QC-100, 20•20ES & 20•20ESG)	UN-27970
<input type="checkbox"/> Roll-In Plate Cart (fits 20•20ES & 20•20ESG)	UN-27971
65-1/2" x 30-5/16" x 39-9/16" (1663mm x 770mm x 1004mm)	
2-11/16" (69mm) SPACING	
HOLDS 114 10-12" (254-305mm) DIAMETER PLATES	
<input type="checkbox"/> Roll-In Plate Cart (fits 20•20ES & 20•20ESG)	UN-28311
65-1/2" x 30-5/16" x 39-9/16" (1663mm x 770mm x 1004mm)	
3-1/2" (89mm) SPACING	
HOLDS 78 10-12" (254-305mm) DIAMETER PLATES	
<input type="checkbox"/> Shelf, Stainless Steel Wire	SH-22473

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>