



STRATEGY SERIES™ SURFACE MOUNT LOUDSPEAKERS

SM52-B
SM52-W

One



SM52-W



SM52-B

SPECIFICATIONS

MODEL:	SM52(-B)(-W)
POWER RATING (RMS):	100 W
IMPEDANCE, NOMINAL:	8 Ohm
FREQUENCY RESPONSE (± 3dB):	85Hz to 20kHz
SENSITIVITY (1W/1M):	90dB
WOOFER	SIZE: 5¼"
	CONE: Polypropylene
	SURROUND: Rubber
	MAGNET: 20 oz
TWEETER	SIZE: 1" (25mm)
	DIAPHRAM
	MATERIAL: Mylar
	MAGNET: 1.39 oz
CROSSOVER FREQUENCY:	5000 Hz
CROSSOVER TYPE:	1st Order Low Pass, 2nd Order High Pass
DIMENSIONS:	10¾"H x 6¾"W x 5¾"D 28.5cm x 17.5cm x 14.85cm
WEIGHT (WITH BRACKET):	7.05 lbs. (3.2kg)

FEATURES:

- Compact, 2-way loudspeaker systems for exceptional performance in music and sound reinforcement systems
- Weather-resistant construction for year-round indoor or outdoor use: UV-resistant-talc-impregnated-polypropylene injection molded enclosure, powder coated aluminum grilles and all brass hardware inserts
- Conforms to 100HR salt spray test per ASTM B117
- Color matched heavy-duty zinc chromate plated and powder coated "C" bracket (included)
- Highly efficient 5¼" polypropylene woofer
- 1" FerroFluid™ cooled dome tweeter
- Atlas Sound TRX WAVEGUIDE™— A constant directivity style high frequency wave guide system provides accurate, even high frequency coverage
- Atlas Sound POLYGUARD™ high frequency circuit diverts damaging transient signals to protect the tweeter
- All ¼"-20 hardware inserts allow easy integration of "off-the-shelf" security hardware
- OMNIMOUNT™ 25 series compatible
- Available in black or white
- Five-year warranty

APPLICATIONS:

Use surface-mount Atlas Sound SM52 Series loudspeaker systems for commercial, professional and residential applications or where high-fidelity sound and weather-resistance is desired. Full-range frequency response makes these systems ideal for indoor and outdoor installation, in monaural and stereo foreground or background music systems, and for applications in boutiques/shops, restaurants/cafes, leisure, recreation/sports centers and houses of worship. Multi-position, C-shaped mounting bracket and rugged construction provide optimum installation flexibility and assurance of long-term service.

GENERAL DESCRIPTION:

Environment-resistant SM Series loudspeaker systems offer quality sound reproduction and contemporary styling in a compact enclosure. System components consist of a highly efficient woofer section and FerroFluid cooled, titanium dome high frequency device. Vocal and musical clarity is optimized by the mathematically conceived, advanced design of the Atlas Sound TRX Control WaveGuide high frequency director. This design provides smooth, even sound coverage (90°H x 90°V). The high frequency section is symmetrical, for equal coverage in both vertical and horizontal cabinet mounting positions. High frequency component protection is provided by the Atlas Sound PolyGuard protection circuit. Both drivers feature low-flux-leakage designs enabling the speaker to be used in close proximity to video monitors. For critical video monitoring applications, a minimum distance of 18 inches from the edge of the loudspeaker to the edge of the CRT is recommended.

To withstand the harshest environments, the new Strategy Series SM52 surface mount loudspeakers are constructed of weather resistant materials: UV-resistant, talc impregnated, polypropylene injection molded cabinets; Polypropylene woofer cones; powder coated aluminum grilles and all brass hardware. The Strategy Series speaker systems include a versatile yet simple C-bracket designed to provide easy vertical or horizontal installation on just about any surface.

Model SM52T (70.7/100V) Version also available, see SL1-1192

Specifications subject to change without notice



1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A.
TELEPHONE: (800) 876-3333 / FAX (800) 765-3435



AtlasSound.com

Care should be taken to ensure that the chosen fixing point is strong enough to support the SM52. Care should also be taken to ensure that the SM52 is not exposed to direct precipitation. A 1/8"-27 threaded hole is provided on the C-bracket to allow the SM52 series speaker to be mounted on any Atlas Sound microphone stand for near-field live sound applications. 2% OC brass inserts are also provided on the rear of the SM52 to accommodate OMNIMOUNT™ 25 series brackets. All inserts for mounting knobs are standard 1/4"-20 to allow easy substitution of off-the-shelf vandal-proof torx head or "one-way" hardware. Input connectors include a sealed 1/4" phone jack and touch-proof 5-way binding posts capable of accepting up to #12AWG cable. 1/4" jack and binding posts are paralleled to allow "daisy chain" connections between the two connector types. A tongue-in-groove cover with rubber wire exit grommet is provided to insure input connections are protected. Systems are available in black or white and can be painted to accommodate any architectural considerations.

ARCHITECT AND ENGINEER SPECIFICATIONS

The indoor/outdoor mini-loudspeaker system shall be Atlas Sound Model _____ (SM52-B or SM52-W) or approved equal.

Assemblies shall consist of 2-way, woofer and tweeter, within environment-resistant housings. Enclosure shall be constructed of paintable UV-resistant, talc impregnated, polypropylene, injection molded plastic finished in black (SM52-B) or white (SM52-W). Each unit shall include a stamped, powder coated, aluminum grille and removable C-shaped mounting bracket. All hardware inserts shall be brass and threaded 1/4"-20. The 100 Watt RMS system shall have a 5 1/4" (133mm) woofer, constructed of reinforced polypropylene and a 1" (25mm) FerroFluid tweeter. The dividing network crossover frequency shall be 5000 Hz. The dividing network shall include protection circuits for the high-frequency component. The loudspeaker system shall meet the following performance criteria: Power handling, 100 Watts RMS; Frequency response, ±3dB from 85 Hz to 20 kHz; Pressure sensitivity, 90dB SPL at one watt, 100 Hz to 10 kHz measured at a distance of one meter on axis. Impedance shall be 8 ohms nominal. Input connectors shall include (1) sealed 1/4" phone jack and (1) 5-way touch-proof binding post. A tongue-in-groove cover with rubber wire exit grommet shall be provided to protect the input connectors. The loudspeaker system shall exhibit no performance or cosmetic degradation after a 100 hour salt spray test per ASTM B117 The unit shall be 10 5/8" (25.8cm) high, 6 1/4" (17.5cm) wide, 5 1/4" (14.85cm) deep.

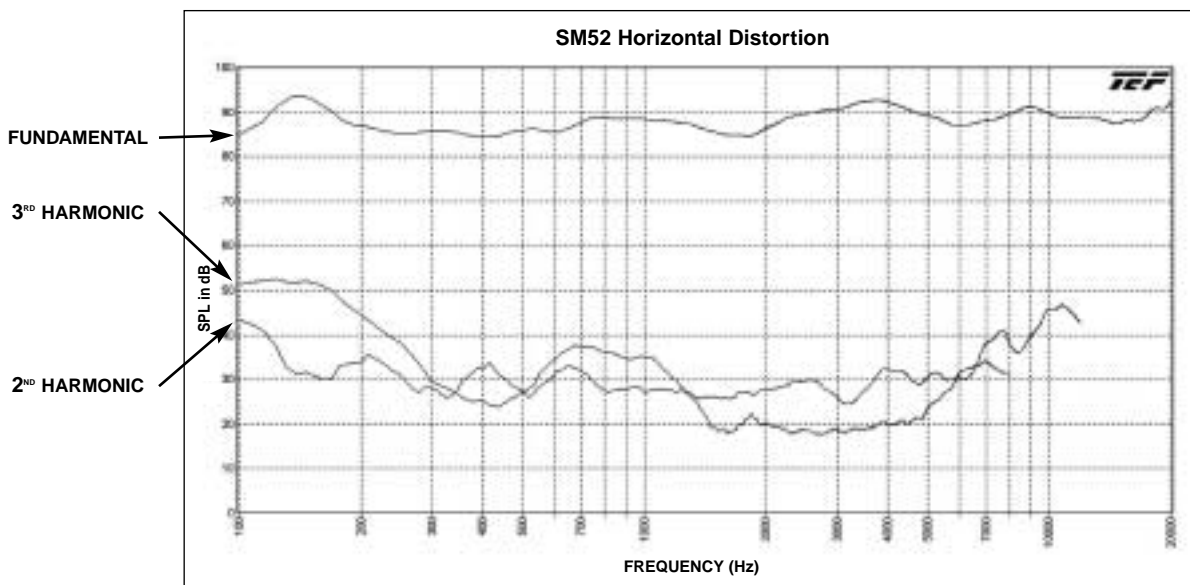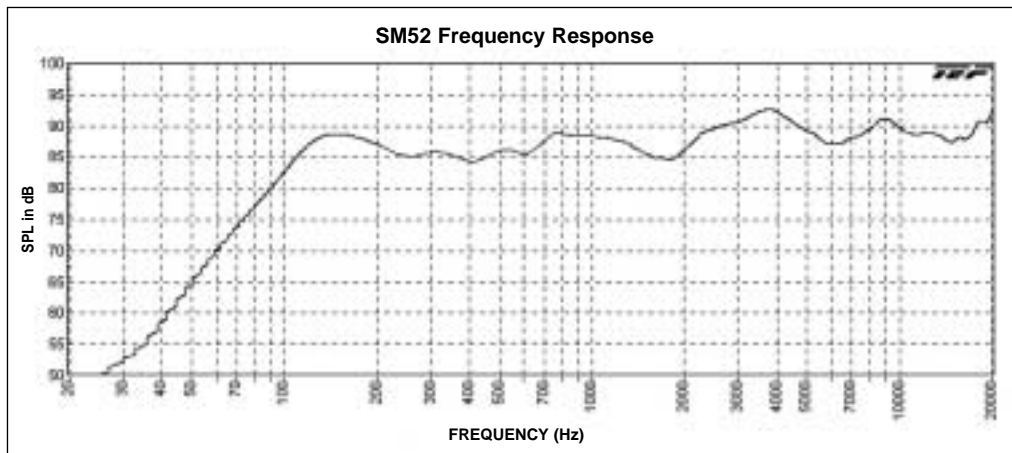


Specifications subject to change without notice




1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A.
 TELEPHONE: (800) 876-3333 / FAX (800) 765-3435

AtlasSound.com



SM52 Horizontal Beamwidth vs. Frequency

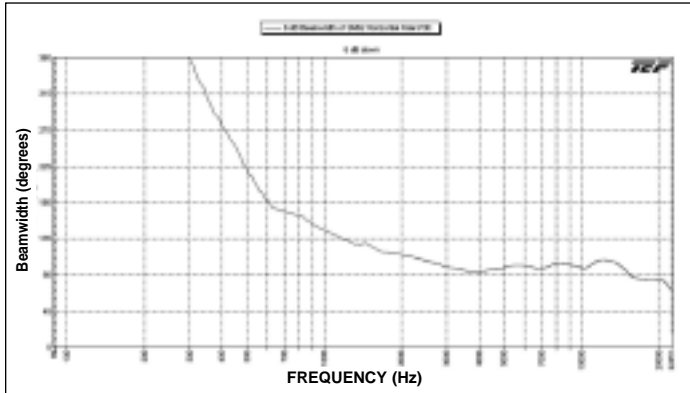



SM52 Vertical Beamwidth vs. Frequency

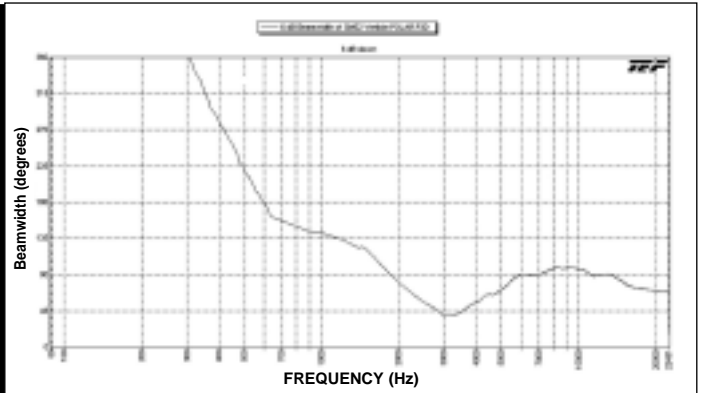

SM52 Horizontal Polar

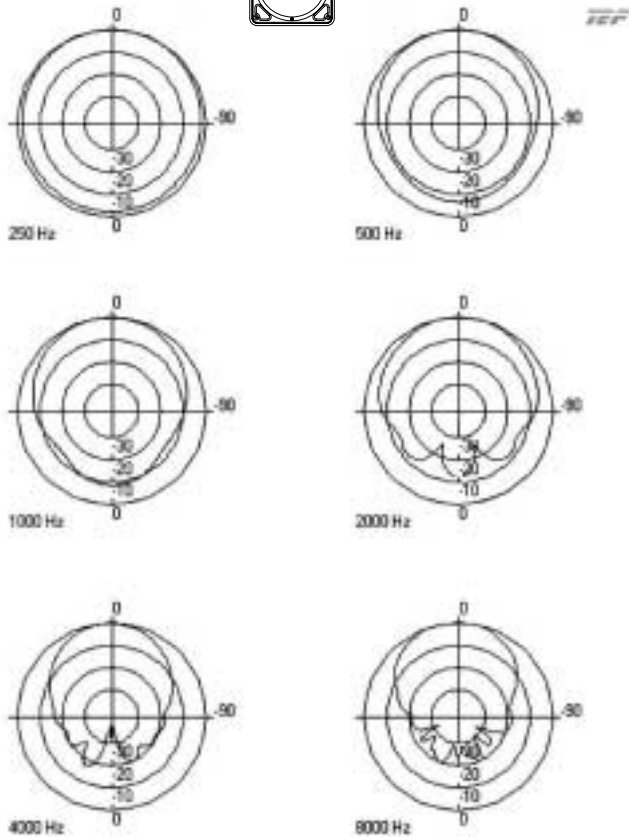

SM52 Vertical Polar

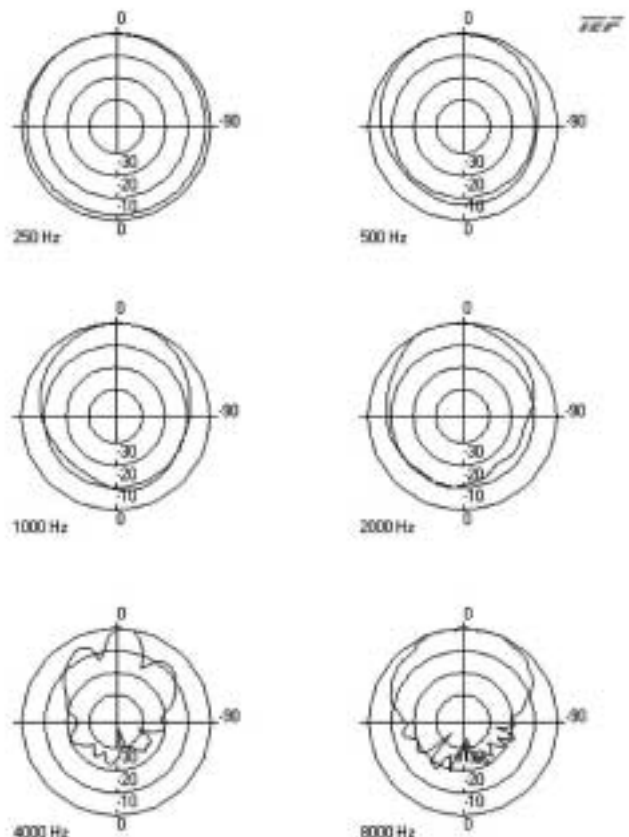

Specifications subject to change without notice



1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A.
 TELEPHONE: (800) 876-3333 / FAX (800) 765-3435

AtlasSound.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>