

EMC38-12
12 PORT ETHERNET MEDIA CONVERTER
USER'S GUIDE

CABLETRON
SYSTEMS

The Complete Networking Solution™

CABLETRON SYSTEMS, P. O. Box 5005, Rochester, NH 03866-5005




NOTICE

Cabletron Systems reserves the right to make changes in specifications and other information contained in this document without prior notice. The reader should in all cases consult Cabletron Systems to determine whether any such changes have been made.

The hardware, firmware, or software described in this manual is subject to change without notice.

IN NO EVENT SHALL CABLETRON SYSTEMS BE LIABLE FOR ANY INCIDENTAL, INDIRECT, SPECIAL, OR CONSEQUENTIAL DAMAGES WHATSOEVER (INCLUDING BUT NOT LIMITED TO LOST PROFITS) ARISING OUT OF OR RELATED TO THIS MANUAL OR THE INFORMATION CONTAINED IN IT, EVEN IF CABLETRON SYSTEMS HAS BEEN ADVISED OF, KNOWN, OR SHOULD HAVE KNOWN, THE POSSIBILITY OF SUCH DAMAGES.



This electric hazard symbol appears in the EMC38-12 User's Guide. Read all instructions following this symbol. Failure to follow the instructions appearing with this symbol could result in the presence of an electric hazard which has the potential to cause injury.

© Copyright December 1994 by:
Cabletron Systems, Inc., P.O. Box 5005, Rochester, NH 03866-5005

All Rights Reserved
Printed in the United States of America

Part Number: 9031329 December 1994

LANVIEW is a registered trademark of Cabletron Systems, Inc.
Windows is a registered trademark of Microsoft Corp.
Ethernet is a trademark of Xerox Corp.
CompuServe is a registered trademark of CompuServe.

Printed On



Recycled Paper

FCC NOTICE

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment uses, generates, and can radiate radio frequency energy and if not installed in accordance with the operator's manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause interference in which case the user will be required to correct the interference at his own expense.

WARNING: Changes or modifications made to this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

DOC NOTICE

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la class A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

VCCI NOTICE

This equipment is in the 1st Class Category (information equipment to be used in commercial and/or industrial areas) and conforms to the standards set by the Voluntary Control Council for Interference by Information Technology Equipment (VCCI) aimed at preventing radio interference in commercial and/or industrial areas.

Consequently, when used in a residential area or in an adjacent area thereto, radio interference may be caused to radios and TV receivers, etc.

Read the instructions for correct handling.

この装置は、第一種情報装置（商工業地域において使用されるべき情報装置）で商工業地域での電波障害防止を目的とした情報処理装置等電波障害自主規制協議会（VCCI）基準に適合しております。

従って、住宅地域またはその隣接した地域で使用すると、ラジオ、テレビジョン受信機等に受信障害を与えることがあります。

取扱説明書に従って正しい取り扱いをして下さい。

CABLETRON SYSTEMS, INC. PROGRAM LICENSE AGREEMENT

IMPORTANT: Before utilizing this product, carefully read this License Agreement.

This document is an agreement between you, the end user, and Cabletron Systems, Inc. (“Cabletron”) that sets forth your rights and obligations with respect to the Cabletron software program (the “Program”) contained in this package. The Program may be contained in firmware, chips or other media. BY UTILIZING THE ENCLOSED PRODUCT, YOU ARE AGREEING TO BECOME BOUND BY THE TERMS OF THIS AGREEMENT, WHICH INCLUDES THE LICENSE AND THE LIMITATION OF WARRANTY AND DISCLAIMER OF LIABILITY. IF YOU DO NOT AGREE TO THE TERMS OF THIS AGREEMENT, PROMPTLY RETURN THE UNUSED PRODUCT TO THE PLACE OF PURCHASE FOR A FULL REFUND.

CABLETRON SOFTWARE PROGRAM LICENSE

1. **LICENSE.** You have the right to use only the one (1) copy of the Program provided in this package subject to the terms and conditions of this License Agreement.

You may not copy, reproduce or transmit any part of the Program except as permitted by the Copyright Act of the United States or as authorized in writing by Cabletron.

2. **OTHER RESTRICTIONS.** You may not reverse engineer, decompile, or disassemble the Program.

3. **APPLICABLE LAW.** This License Agreement shall be interpreted and governed under the laws and in the state and federal courts of New Hampshire. You accept the personal jurisdiction and venue of the New Hampshire courts.

EXCLUSION OF WARRANTY AND DISCLAIMER OF LIABILITY

1. **EXCLUSION OF WARRANTY.** Except as may be specifically provided by Cabletron in writing, Cabletron makes no warranty, expressed or implied, concerning the Program (including Its documentation and media).

CABLETRON DISCLAIMS ALL WARRANTIES, OTHER THAN THOSE SUPPLIED TO YOU BY CABLETRON IN WRITING, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE PROGRAM, THE ACCOMPANYING WRITTEN MATERIALS, AND ANY ACCOMPANYING HARDWARE.

2. **NO LIABILITY FOR CONSEQUENTIAL DAMAGES.** IN NO EVENT SHALL CABLETRON OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS, PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION, SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR RELIANCE DAMAGES, OR OTHER LOSS) ARISING OUT OF THE USE OR INABILITY TO USE THIS CABLETRON PRODUCT, EVEN IF CABLETRON HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, OR ON THE DURATION OR LIMITATION OF IMPLIED WARRANTIES IN SOME INSTANCES THE ABOVE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU.

UNITED STATES GOVERNMENT RESTRICTED RIGHTS

The enclosed product (a) was developed solely at private expense; (b) contains “restricted computer software” submitted with restricted rights in accordance with Section 52227-19 (a) through (d) of the Commercial Computer Software - Restricted Rights Clause and its successors, and (c) in all respects is proprietary data belonging to Cabletron and/or its suppliers.

For Department of Defense units, the product is licensed with “Restricted Rights” as defined in the DoD Supplement to the Federal Acquisition Regulations, Section 52.227-7013 (c) (1) (ii) and its successors, and use, duplication, disclosure by the Government is subject to restrictions as set forth in subparagraph (c) (1) (ii) of the Rights in Technical Data and Computer Software clause at 252.227-7013. Cabletron Systems, Inc., 35 Industrial Way. Rochester, New Hampshire 03867.

TABLE OF CONTENTS

CHAPTER 1 INTRODUCTION

1.1	USING THIS MANUAL	1-1
1.2	GETTING HELP	1-2
1.3	EMC38-12 OVERVIEW	1-2
1.4	EMC38-12 FEATURES	1-3
1.5	EMC38-12 SPECIFICATIONS	1-3

CHAPTER 2 INSTALLATION

2.1	UNPACKING THE EMC38-12	2-1
2.2	INSTALLING THE EMC38-12	2-1
	2.2.1 Rack Mounting the EMC38-12	2-2
	2.2.2 Free-Standing Shelf or Tabletop Installation	2-3
2.3	CONNECTING THE EMC38-12 TO THE POWER SOURCE	2-4

CHAPTER 3 CONNECTING TO THE NETWORK

3.1	CONNECTING A TWISTED PAIR SEGMENT TO THE EMC38-12	3-1
3.2	CONNECTING A FIBER OPTIC LINK SEGMENT	3-2
3.3	FINISHING THE INSTALLATION	3-4

CHAPTER 4 USING THE LANVIEW LEDS

4.1	PWR (Power)	4-1
4.2	XMT (Transmit)	4-1
4.3	RCV (Receive)	4-2
4.4	TPLNK (Twisted Pair Link)	4-2
4.5	FOLNK (Fiber Optic Link)	4-2

APPENDIX A CABLE REQUIREMENTS

A.1	10Base-T TWISTED PAIR REQUIREMENTS	A-1
A.2	10Base-FL MULTIMODE FIBER REQUIREMENTS	A-2

TABLE OF CONTENTS

APPENDIX B TWISTED PAIR WIRING TABLES

B.1 TWISTED PAIR WIRING FROM AN EMC38-12 TO A PUNCH DOWN BLOCK..... B-2

B.2 TWISTED PAIR WIRING FROM A PUNCH DOWN BLOCK TO A 10Base-T DEVICE B-5

CHAPTER 1

INTRODUCTION

Welcome to the Cabletron Systems **EMC38-12 User's Guide**. This manual explains installation instructions and provides specifications for the twelve port Ethernet Media Converter (EMC).

1.1 USING THIS MANUAL

Read through this manual to gain an understanding of the features and capabilities of the EMC38-12. You should have a general working knowledge of ethernet IEEE 802.3 10Base-T, and ethernet IEEE 802.3j 10Base-FL type data communications networks and their physical layer components when installing the EMC38-12.

Chapter 1, **Introduction**, describes EMC38-12 features and specifications.

Chapter 2, **Installation**, describes how to install the EMC38-12 into a 19-inch rack or as a stand-alone device.

Chapter 3, **Connecting to the Network**, explains how to connect network segments to the EMC38-12.

Chapter 4, **Using the LANVIEW LEDS**, describes how to use the EMC38-12 LEDs to monitor link and power status.

Appendix A, **Cable Requirements** lists twisted pair and multimode cable requirements for the EMC38-12.

Appendix B, **Twisted Pair Wiring Tables**, lists pinouts for the 50-pin twisted pair connector.

1.2 GETTING HELP

If you need additional support related to the EMC38-12, or if you have any questions, comments, or suggestions concerning this manual, contact Cabletron Systems Technical Support:

- By phone (603) 332-9400
Monday-Friday; 8am - 8pm EST
- By CompuServe® GO CTRON from any! prompt
- By Internet mail support@ctrn.com

1.3 EMC38-12 OVERVIEW

The EMC38-12 converts ethernet IEEE 802.3 10Base-T signals to ethernet IEEE 802.3j 10Base-FL signals. It also converts ethernet 10Base-T signals to ethernet 10Base-FL signals. The rear panel has a 50-pin Champ connector (RJ-71) that supports twelve twisted pair segments. The front panel has twelve 10Base-FL multimode ST ports. Figure 1-1 shows the EMC38-12 ports. The 10Base-FL connectors are backward compatible with FOIRL connectors.

Each of the rear panel twisted pair ports has a corresponding fiber port.

For example: Twisted pair Port 1 converts signals to fiber optic Port 1, twisted pair port 2 converts signals to fiber optic port 2, etc.

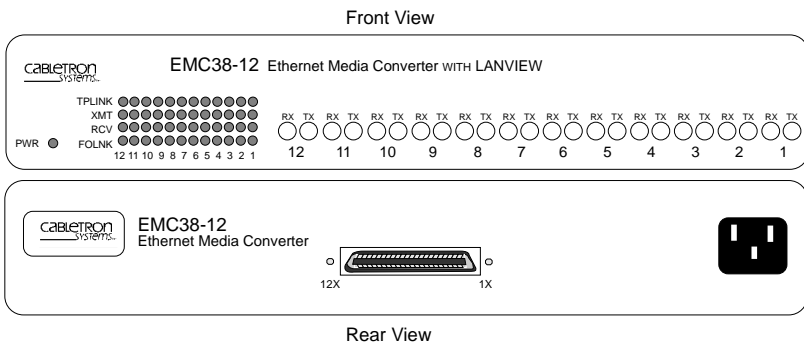


Figure 1-1. The EMC38-12

1.4 EMC38-12 FEATURES

Automatic Transmit Port Disable

The EMC38-12 automatically disables the Transmit port when its corresponding Receive port does not have a link.

Full Duplex Ethernet Support

All of the EMC38-12 ports support Full Duplex Ethernet provided that the device at the other end of the port supports Full Duplex Ethernet also. Full Duplex Ethernet allows the EMC38-12 to transmit and receive signals simultaneously for a 20 Megabit bandwidth through-put.

LANVIEW Diagnostic LEDs

Cabletron equips the EMC38-12 with a visual diagnostic and monitoring system called LANVIEW. LANVIEW LEDs help you quickly identify Power and Link status.

Connectivity

The rear panel of the EMC38-12 has a 50-pin Champ connector (RJ-71) that supports twelve twisted pair segments. The front panel has twelve 10Base-FL multimode ST ports. Each multimode ST port has a Receive connector and a Transmit connector.

1.5 EMC38-12 SPECIFICATIONS

This section describes operating specifications for the EMC38-12. Cabletron Systems reserves the right to change these specifications at any time without notice.

Physical Specifications

Dimensions: 17" L x 9.4" W x 1.7" H

Weight: 4 lbs.

Power Requirements

Input: 100 to 125 Volts AC, 1.0A
200 to 240 Volts AC, 0.5A
50 to 60 Hz

Environmental Requirements

Operating Temperature: +5° to +40° C (41° to 104° F)

Non-operating Temperature: -30° to +90° C (-22° to 194° F)

Operating Humidity: 5 to 95% (non-condensing)

Safety and Approvals

This unit meets the safety requirements of UL 1950, CSA C22.2 NO 950, and EN 60950; the EMI requirements of FCC Class A and EN 55022 Class A, VCCI Class I; and the EMC requirements of EN 50082-1.

CHAPTER 2

INSTALLATION

This chapter explains how to install the EMC38-12 in a 19-inch rack and also provides requirements for installing the EMC38-12 on a tabletop or shelf.

2.1 UNPACKING THE EMC38-12

Unpack the EMC38-12 as follows:

1. Remove the shipping box material covering the EMC38-12.
2. Carefully remove the EMC38-12 from the shipping box.
3. Remove the EMC38-12 from its non-conductive bag. If you notice any signs of damage, contact Cabletron Systems Technical Support immediately.

2.2 INSTALLING THE EMC38-12

You can install the EMC38-12 in a 19-inch rack or place it on any horizontal surface (e.g. a table or shelf). Cabletron provides an accessory kit with the EMC38-12 that includes Rack Mount Brackets and Mounting Screws.


The following sections provide instructions for installing the EMC38-12. Select one of the following subsections and perform the steps that are applicable to your installation needs.

2.2.1 Rack Mounting the EMC38-12

Before installing the EMC38-12, care must be taken to ensure that the rack used will support the unit and that the rack remains stable with the EMC38-12 installed. In order to allow for proper cooling within the rack, there must be a two inch clearance on either side of the unit. Refer to **Chapter 1** for power and enviromental requirements.

The following procedure explain how to install the EMC38-12 in a 19-Inch rack.

1. Remove four cover screws (two from each side) located along the front edges of each side of the EMC38-12. Figure 2-1 shows the location of the screws.



Do not remove the cover from the EMC38-12.

2. Using the four cover screws removed in step 1, attach the rack mounting brackets to each end of the EMC38-12.

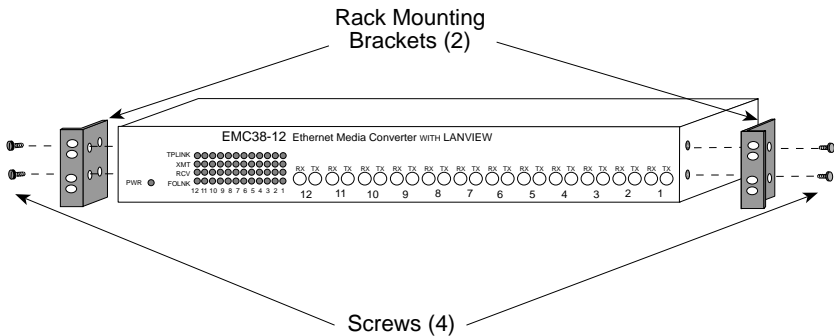


Figure 2-1. Installing the Rack Mount Brackets

2.3 CONNECTING THE EMC38-12 TO THE POWER SOURCE

Note: The EMC38-12 has a universal power supply. This allows you to connect the EMC38-12 to power sources from 100 Vac to 125 Vac, 50-60 Hz, or 200 Vac to 240 Vac, 50-60 Hz.

To connect the EMC38-12 to the power source:

1. Plug the power cord into the back panel of the EMC38-12.
2. Plug the other end of the power cord into a grounded wall outlet.
3. Verify that the **PWR** LED is on, this indicates that the EMC38-12 is receiving power.

CHAPTER 3

CONNECTING TO THE NETWORK

This chapter outlines the procedure for connecting the EMC38-12 to your network.

3.1 CONNECTING A TWISTED PAIR SEGMENT TO THE EMC38-12

The rear panel of the EMC38-12 has a 50-pin Champ connector. The configuration outlined in this section explains how to attach a twisted pair cable to the EMC38-12 and to a 10Base-T compliant ethernet device that has a 50-pin Champ connector (e.g. Cabletron's ELM or TPRMIM).

You can also run a 50-pin feeder cable from the EMC38-12 to a punch down block. The Champ connector supports twelve 10Base-T, twisted pair segments.

*Note: Refer to **Appendix B** for information about wiring the EMC38-12 to a punch down block.*

To connect the EMC38-12 to a 10Base-T compliant ethernet device:

1. Attach a 50-pin feeder cable to the Champ connector on the EMC38-12 as shown in Figure 3-1.

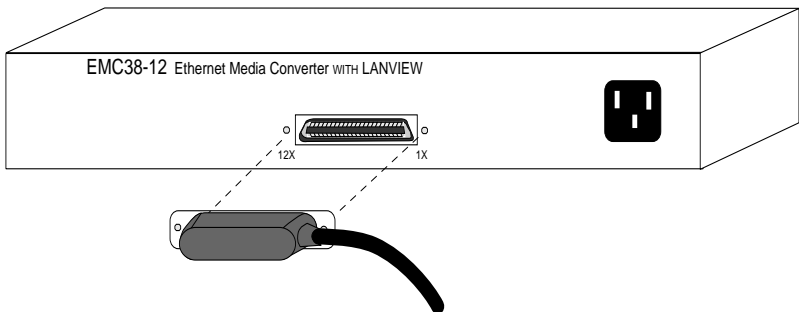


Figure 3-1. EMC38-12

2. Attach the other end of the 50-pin feeder cable to the Champ connector on the 10Base-T compliant ethernet device.
3. Check that the link LED on the 10Base-T ethernet device and the applicable **TPLNK** LED on the EMC38-12 are on. If the LEDs are not on, perform each of the following steps until the LEDs are on:
 - a. Check that the 10Base-T device and the EMC38-12 have power.
 - b. Verify the cabling between the EMC38-12 and the 10Base-T device.
 - c. Check the cable for continuity.

If a link has not been established, contact Cabletron Systems Technical Support.

3.2 CONNECTING A FIBER OPTIC LINK SEGMENT

When connecting a fiber optic link segment the EMC38-12 keep the following in mind:

- ST connectors attach to ST ports much like BNC connectors attach to BNC ports. Insert the connector into the port with the alignment key on the connector inserted into the alignment slot on the port. The connector is then turned to lock it down.
- The physical communication link consists of two strands of fiber optic cabling: the Transmit (TX) and the Receive (RX). The Transmit strand from the applicable port on the module will be connected to the Receive port of a fiber optic ethernet device at the other end of the segment. For example, TX of the applicable port on the module will go to RX of the other fiber optic device. The Receive strand of the applicable port on the module will be connected to the Transmit port of the fiber optic ethernet device. For example, RX of the applicable port on the module will go to TX of the other fiber optic device.

We recommend that you label the fiber optic cable to indicate which fiber is Receive and which is Transmit. When you buy fiber optic cable from Cabletron Systems, it is labeled so that: at one end of the cable, one fiber is labeled 1, and the other fiber is labeled 2. This pattern is repeated at the other end of the cable. If you did not purchase your cable from Cabletron Systems, be sure you label your cable as described above.

Caution: Do not touch the ends of the fiber optic strands, and do not let the ends come in contact with dust, dirt, or other contaminants. Contamination of the ends can cause problems in data transmissions. If the ends become contaminated, clean them with alcohol using a soft, clean, lint free cloth.

To connect a fiber optic link segment to the EMC38-12:

1. Remove the protective plastic covers from the fiber optic ports on the applicable port on the module and from the ends of the connectors on each fiber strand.
2. Attach the fiber labeled 1 to the applicable receive port, labeled **RX**, on the module. See Figure 3-2.

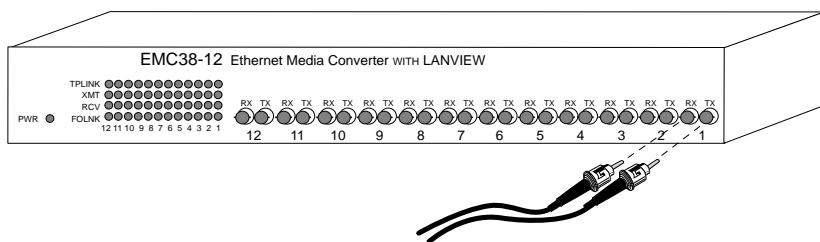


Figure 3-2. Connecting a Fiber Link to the EMC38-12

3. Attach the fiber labeled 2 to the applicable transmit port labeled **TX**, on the module.
4. At the other end of the fiber optic cable, attach the fiber labeled 1 to the transmit port of the device.

5. Attach the fiber labeled 2 to the receive port.
6. Check that the **FOLNK** LED on the ECM38-12 is on. If the LED is not on, perform the following steps until it is:
 - a. Check that the power is turned on for the device at the other end of the link.
 - b. Verify proper “receive to transmit” connection of fiber strands between the applicable port on the module and the fiber optic device at the other end of the fiber optic link segment.
 - c. Verify that the fiber connection meets the dB loss specifications outlined in Appendix A.

If a link still has not been established, contact Cabletron Systems Technical Support.

3.3 FINISHING THE INSTALLATION

The EMC38-12 is now ready for operation. Before placing the network into service, test the installation thoroughly, making sure that you can address all stations and that the EMC38-12 and all stations are indicating normal operation. Ensure that the networking software is configured properly to match the installed network. If you encounter errors or abnormal operation, contact Cabletron Systems Technical Support.

CHAPTER 4

USING THE LANVIEW LEDS

This chapter describes how to use the LANVIEW Diagnostic LEDs to monitor EMC38-12 status and diagnose problems.

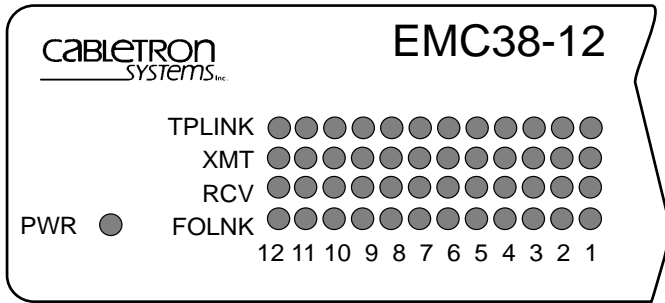


Figure 4-1. LANVIEW LEDS

4.1 PWR (Power)

- **On (Green)** - Indicates that the EMC38-12 is receiving power.
- **Off** - Indicates that the unit is not receiving power. Check the input power source (circuit breakers, fuse, power cord, etc.). If the proper source is present, the problem could be with the unit.

4.2 XMT (Transmit)

- **On (Flashing Green)** - Indicates that the unit is transmitting data packets from the twisted pair port to the fiber optic port. The flash of the LED is pulse stretched for viewing effect. The LED could be on solid because of this viewing effect.
- **Off** - No activity.

4.3 RCV (Receive)

- **On (Flashing Yellow)** - Indicates that the unit is receiving data packets from the associated fiber optic port and transmitting them to the twisted pair port. The flash of the LED is pulse stretched for viewing effect. The LED may be on, but appear not to flash because of the pulse stretched viewing effect.
- **Off** - No activity.

4.4 TPLNK (Twisted Pair Link)

- **On (Green)** - Indicates an established link between the associated twisted pair segment and the 10Base-T device at the other end of the segment. The LED will remain on as long as there is a link between the devices and power is supplied to each linked device.
- **Off** - No link.

4.5 FOLNK (Fiber Optic Link)

- **On (Green)** - Indicates an established link between the associated fiber segment and the 10Base-FL device at the other end of the segment. The LED will remain on as long as there is a link between the devices and power is supplied to each linked device.
- **Off** - No link.

APPENDIX A

CABLE REQUIREMENTS

This appendix provides cable requirements for each of the EMC38-12 ports.

A.1 10Base-T TWISTED PAIR REQUIREMENTS

When you connect a 10Base-T twisted pair segment to the EMC38-12, the device at the other end of the twisted pair segment must meet IEEE 802.3 10Base-T specifications. Your 10Base-T twisted pair segment must meet the following requirements.

Segment Length

The IEEE 802.3 10Base-T standard requires that 10Base-T devices must be able to transmit from 0 to at least 100 meters (328 feet) per segment of 24-gauge unshielded twisted pair (UTP) cable.

Insertion Loss

The maximum insertion loss allowed for a 10Base-T segment is 11.5 db at all frequencies between 5.0 and 10.0 MHz. This includes the attenuation of the cable, connectors, and patch panel.

Impedance

10Base-T specifies cable impedance between 85 and 110 ohms.

A.2 10Base-FL MULTIMODE FIBER REQUIREMENTS

When you connect a 10Base-FL Multimode Fiber segment to the EMC38-12, the device at the other end of the fiber segment must meet IEEE 802.3j 10Base-FL specifications. Your 10Base-FL Multimode Fiber segment must meet the following requirements.

Segment Length

The IEEE 10Base-FL standard requires that devices be able to transmit from 0 to at least 2000 meters (6561 feet) per segment of fiber optic cable.

Optical Connector Insertion Loss

The 10Base-FL standard was developed on the basis of a maximum insertion loss of 1 db.

Segment Insertion Loss

The optical insertion loss of 10Base-FL segments shall be less than 12.5 db, measured using an optical signal source with a center wavelength of 850 nm and a spectral width of 75 nm.

Attenuation

The 10Base-FL standard was developed on the basis of attenuation values of less than or equal to 3.75 dB/km, when measured at a wavelength of 850 nm with 62.5/125 μ m fiber.

APPENDIX B

TWISTED PAIR WIRING TABLES

This appendix contains twisted pair wiring tables which will assist you if you are using a Punch Down Block (see Figure B-1) to wire your twisted pair segments. The following tables are included in this appendix:

- Table B-1 Twisted Pair Wiring from an EMC38-12 to a Punch Down Block
- Table B-2 Twisted Pair Wiring from a Punch Down Block to a 10Base-T Device

B.1 TWISTED PAIR WIRING FROM AN EMC38-12 TO A PUNCH DOWN BLOCK

Note: Pins 25 and 50 on the Champ connector are not used.

Table B-1. EMC38-12 to a Punch Down Block

From EMC38-12	Into and Out of 50 Pin Feeder Cable		Into Punch Down Block
Port 12			
	Pin	Pin	Pin
	TX+ 48	48 Violet/Green TX+	A45 Violet/Green TX+
	TX- 23	23 Green/Violet TX-	A46 Green/Violet TX-
	RX+ 49	49 Violet/Brown RX+	A47 Violet/Brown RX+
	RX- 24	24 Brown/Violet RX-	A48 Brown/Violet RX-
Port 11			
	Pin	Pin	Pin
	TX+ 46	46 Violet/Blue TX+	A41 Violet/Blue TX+
	TX- 21	21 Blue/Violet TX-	A42 Blue/Violet TX-
	RX+ 47	47 Violet/Orange RX+	A43 Violet/Orange RX+
	RX- 22	22 Orange/Violet RX-	A44 Orange/Violet RX-
Port 10			
	Pin	Pin	Pin
	TX+ 44	44 Yellow/Brown TX+	A37 Yellow/Brown TX+
	TX- 19	19 Brown/Yellow TX-	A38 Brown/Yellow TX-
	RX+ 45	45 Yellow/Gray RX+	A39 Yellow/Gray RX+
	RX- 20	20 Gray/Yellow RX-	A40 Gray/Yellow RX-
Port 9			
	Pin	Pin	Pin
	TX+ 42	42 Yellow/Orange TX+	A33 Yellow/Orange TX+
	TX- 17	17 Orange/Yellow TX-	A34 Orange/Yellow TX-
	RX+ 43	43 Yellow/Green RX+	A35 Yellow/Green RX+
	RX- 18	18 Green/Yellow RX-	A36 Green/Yellow RX-

Table B-1. EMC38-12 to a Punch Down Block (Continued)

From EMC38-12	Into and Out of 50 Pin Feeder Cable			Into Punch Down Block		
Port 8						
	Pin	Pin			Pin	
TX+	40	40 Black/Gray	TX+	A29	Black/Gray	TX+
TX-	15	15 Gray/Black	TX-	A30	Gray/Black	TX-
RX+	41	41 Yellow/Blue	RX+	A31	Yellow/Blue	RX+
RX-	16	16 Blue/Yellow	RX-	A32	Blue/Yellow	RX-
Port 7						
	Pin	Pin			Pin	
TX+	38	38 Black/Green	TX+	A25	Black/Green	TX+
TX-	13	13 Green/Black	TX-	A26	Green/Black	TX-
RX+	39	39 Black/Brown	RX+	A27	Black/Brown	RX+
RX-	14	14 Brown/Black	RX-	A28	Brown/Black	RX-
Port 6						
	Pin	Pin			Pin	
TX+	36	36 Black/Blue	TX+	A21	Black/Blue	TX+
TX-	11	11 Blue/Black	TX-	A22	Blue/Black	TX-
RX+	37	37 Black/Orange	RX+	A23	Black/Orange	RX+
RX-	12	12 Orange/Black	RX-	A24	Orange/Black	RX-
Port 5						
	Pin	Pin			Pin	
TX+	34	34 Red/Brown	TX+	A17	Red/Brown	TX+
TX-	9	9 Brown/Red	TX-	A18	Brown/Red	TX-
RX+	35	35 Red/Gray	RX+	A19	Red/Gray	RX+
RX-	10	10 Gray/Red	RX-	A20	Gray/Red	RX-

Table B-1. EMC38-12 to a Punch Down Block (Continued)

From EMC38-12	Into and Out of 50 Pin Feeder Cable			Into Punch Down Block		
Port 4						
	Pin	Pin			Pin	
	TX+ 32	32 Red/Orange	TX+		A13 Red/Orange	TX+
	TX- 7	7 Orange/Red	TX-		A14 Orange/Red	TX-
	RX+ 33	33 Red/Green	RX+		A15 Red/Green	RX+
	RX- 8	8 Green/Red	RX-		A16 Green/Red	RX
Port 3						
	Pin	Pin			Pin	
	TX+ 30	30 White/Gray	TX+		A9 White/Gray	TX+
	TX- 5	5 Gray/White	TX-		A10 Gray/White	TX-
	RX+ 31	31 Red/Blue	RX+		A11 Red/Blue	RX+
	RX- 6	6 Blue/Red	RX-		A12 Blue/Red	RX-
Port 2						
	Pin	Pin			Pin	
	TX+ 28	28 White/Green	TX+		A5 White/Green	TX+
	TX- 3	3 Green/White	TX-		A6 Green/White	TX-
	RX+ 29	29 White/Brown	RX+		A7 White/Brown	RX+
	RX- 4	4 Brown/White	RX-		A8 Brown/White	RX-
Port 1						
	Pin	Pin			Pin	
	TX+ 26	26 White/Blue	TX+		A1 White/Blue	TX+
	TX- 1	1 Blue/White	TX-		A2 Blue/White	TX-
	RX+ 27	27 White/Orange	RX+		A3 White/Orange	RX+
	RX- 2	2 Orange/White	RX-		A4 Orange/White	RX-

B.2 TWISTED PAIR WIRING FROM A PUNCH DOWN BLOCK TO A 10Base-T DEVICE

Table B-2. Punch Down Block to a 10Base-T Device

From Punch Down Block	To RJ-45 Wallplate	Into Office Drop	Into 10Base-T Device
Port 12	Pin	Pin	Pin
B45 Violet/Green RX+	3 RX+	3 RX+	3 RX+
B46 Green/Violet RX-	6 RX-	6 RX-	6 RX-
B47 Violet/Brown TX+	1 TX+	1 TX+	1 TX+
B48 Brown/Violet TX-	2 TX-	2 TX-	2 TX-
Port 11	Pin	Pin	Pin
B41 Violet/Blue RX+	3 RX+	3 RX+	3 RX+
B42 Blue/Violet RX-	6 RX-	6 RX-	6 RX-
B43 Violet/Orange TX+	1 TX+	1 TX+	1 TX+
B44 Orange/Violet TX-	2 TX-	2 TX-	2 TX-
Port 10	Pin	Pin	Pin
B37 Yellow/Brown RX+	3 RX+	3 RX+	3 RX+
B38 Brown/Yellow RX-	6 RX-	6 RX-	6 RX-
B39 Yellow/Gray TX+	1 TX+	1 TX+	1 TX+
B40 Gray/Yellow TX-	2 TX-	2 TX-	2 TX-
Port 9	Pin	Pin	Pin
B33 Yellow/Orange RX+	3 RX+	3 RX+	3 RX+
B34 Orange/Yellow RX-	6 RX-	6 RX-	6 RX-
B35 Yellow/Green TX+	1 TX+	1 TX+	1 TX+
B36 Green/Yellow TX-	2 TX-	2 TX-	2 TX-

Table B-2. Punch Down Block to a 10Base-T Device (Continued)

From Punch Down Block	To RJ-45 Wallplate	Into Office Drop	Into 10Base-T Device
Port 8	Pin	Pin	Pin
B29 Black/Gray RX+	3 RX+	3 RX+	3 RX+
B30 Gray/Black RX-	6 RX-	6 RX-	6 RX-
B31 Yellow/Blue TX+	1 TX+	1 TX+	1 TX+
B32 Blue/Yellow TX-	2 TX-	2 TX-	2 TX-
Port 7	Pin	Pin	Pin
B25 Black/Green RX+	3 RX+	3 RX+	3 RX+
B26 Green/Black RX-	6 RX-	6 RX-	6 RX-
B27 Black/Brown TX+	1 TX+	1 TX+	1 TX+
B28 Brown/Black TX-	2 TX-	2 TX-	2 TX-
Port 6	Pin	Pin	Pin
B21 Black/Blue RX+	3 RX+	3 RX+	3 RX+
B22 Blue/Black RX-	6 RX-	6 RX-	6 RX-
B23 Black/Orange TX+	1 TX+	1 TX+	1 TX+
B24 Orange/Black TX-	2 TX-	2 TX-	2 TX-
Port 5	Pin	Pin	Pin
B17 Red/Brown RX+	3 RX+	3 RX+	3 RX+
B18 Brown/Red RX-	6 RX-	6 RX-	6 RX-
B19 Red/Gray TX+	1 TX+	1 TX+	1 TX+
B20 Gray/Red TX-	2 TX-	2 TX-	2 TX-

Table B-2. Punch Down Block to a 10Base-T Device (Continued)

From Punch Down Block	To RJ-45 Wallplate	Into Office Drop	Into 10Base-T Device
Port 4	Pin	Pin	Pin
B13 Red/Orange RX+	3 RX+	3 RX+	3 RX+
B14 Orange/Red RX-	6 RX-	6 RX-	6 RX-
B15 Red/Green TX+	1 TX+	1 TX+	1 TX-
B16 Green/Red TX-	2 TX-	2 TX-	2 TX-
Port 3	Pin	Pin	Pin
B9 White/Gray RX+	3 RX+	3 RX+	3 RX+
B10 Gray/White RX-	6 RX-	6 RX-	6 RX-
B11 Red/Blue TX+	11 TX+	1 TX+	1 TX+
B12 Blue/Red TX-	2 TX-	2 TX-	2 TX-
Port 2	Pin	Pin	Pin
B5 White/Green RX+	3 RX+	3 RX+	3 RX+
B6 Green/White RX-	6 RX-	6 RX-	6 RX-
B7 White/Brown TX+	1 TX+	1 TX+	1 TX+
B8 Brown/White TX-	2 TX-	2 TX-	2 TX-
Port 1	Pin	Pin	Pin
B1 White/Blue RX+	3 RX+	3 RX+	3 RX+
B2 Blue/White RX-	6 RX-	6 RX-	6 RX-
B3 White/Orange TX+	1 TX+	1 TX+	1 TX+
B4 Orange/White TX-	2 TX-	2 TX-	2 TX-

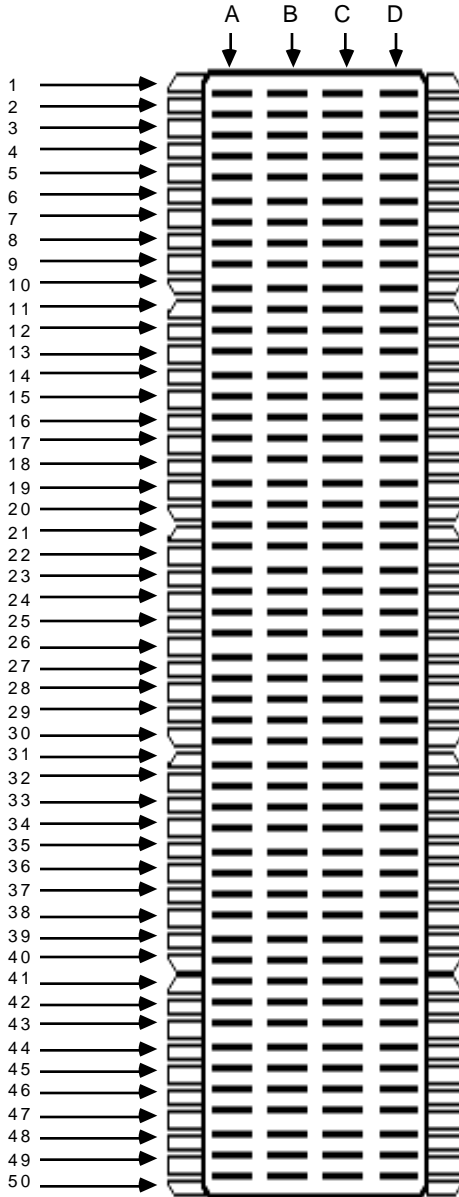


Figure B-1. Punch Down Block Pins

POWER SUPPLY CORD

The mains cord used with this equipment must be a 2 conductor plus ground type with minimum 0.75 mm square conductors and must incorporate a standard IEC appliance coupler on one end and a mains plug on the other end which is suitable for the use and application of the product and that is approved for use in the country of application.

GERMAN:

Die Netzleitung, die mit diesem Geraet benuetzt wird, soll einen zwei Leiter mit Erdleiter haben, wobei die Leiter mindestens 0.75 mm sind, mit einer normalen IEC Geraetesteckdose an einem Ende und einem Geraetestecker am anderen Ende versehen sind, der fuer den Gebrauch und die Anwendung des Geraetes geeignet und der zum Benuetzen im Lande der Anwendung anerkannt ist.

SPANISH:

El cable principal de la red eléctrica utilizado con este equipo debe tener 2 conductores y 1 toma de tierra con un mínimo de 0.75 mm² cada uno y necesita tener un aparato de acoplamiento standard IEC en un extremo y un enchufe para el cable principal de la red eléctrica en el otro extremo, lo cual sea adecuado para el uso y aplicación del producto y lo cual sea aprobado para uso en el país de aplicación.

FRENCH:

Le cordon d'alimentation reliant cet appareil au secteur doit obligatoirement avoir deux fils conducteurs de 0.75 mm² minimum et un fil de terre. It doit également être équipé du côté appareil d'une fiche agréée IEC et du côté secteur, d'une prise adaptée à l'usage du produit et aux normes du pays où l'appareil est utilisé.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>