

1 Load the Memory Protection Batteries and Paper Roll

- A) Remove the printer cover. B) Open battery compartment cover. C) Insert 2 new "AA" type batteries in to the compartment.



IMPORTANT Be sure that the plus (+) and minus (-) ends of the batteries are facing in the directions indicated the illustration inside the battery compartment.


! To prevent to lose all of your setting and sales data, we recommended you to install the memory protection batteries.

- D) Install the supplied 58mm thermal paper roll by lifting up the platen arm (Push open button) and placing the paper roll into the printer well. Close the cover firmly.



2 Initialize Your Cash Register

- A) Insert the supplied key and turn to the "OFF" position. B) Plug the power cord into an AC outlet, then a message is printed.

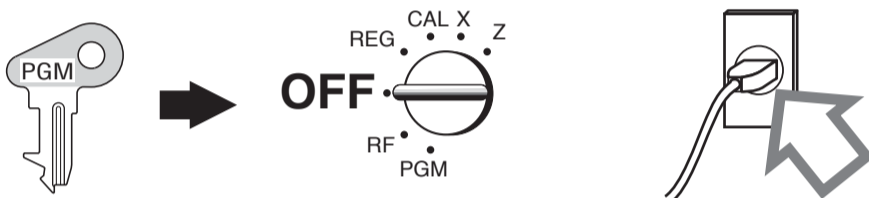

3 Choosing the language if necessary

- A) You can choose the printout language from English, French or Spanish.
 B) Read the printout and follow the procedure printed on the chit. Select the language code (0 ~ 2) and press **CA/AMT/TEND** key.

4 Setting the Date and Time

- A) Follow the procedure printed on the chit to set the date and time.

5 Printer switch for receipt or journal

In case of printing a journal;

- A) Turn the key to the "PGM" position.
 B) Perform steps below.


1 **SUB TOTAL** **1** **CH**

In case of issuing receipts;

- A) Turn the key to the "PGM" position.
 B) Perform steps below.

1 **SUB TOTAL** **0** **CH**

Default printer definition is receipt printer.

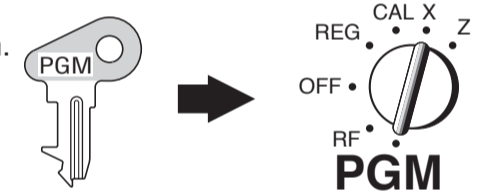

6 Setting Tax Rates

Tax Rates can be set 2 ways : Perform procedure 1) or procedure 2).

1) Choose the tax rate from a preset tax table.

- A) Enter **0 2** and press **HELP** .
 B) Select your state.

Find your state →

SELECT YOUR STATE OR COUNTRY AND ENTER NUMBER THEN PRESS <HELP> KEY.

0101: ALABAMA
 0201: ALASKA

5001: WISCONSIN
 5101: WYOMING
 5201: PUERTO RICO

- C) Enter your four digit state number and then press **HELP** .

0 1 0 1 **HELP**

your state number.

Follow these steps →

1)TURN MODE KEY TO PGM.
 2)3<SUBTOTAL>
 3)025<SUBTOTAL>
 SET TABLE 1
 4)XXXX<CA>KEY.
 SET TABLE2(IF NECESSARY)
 5)XXXX<CA>KEY.
 6)<SUBTOTAL>
 XXXX IS DISTRICT NUMBER

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>