




WebRunner PCI

A01-PP3R

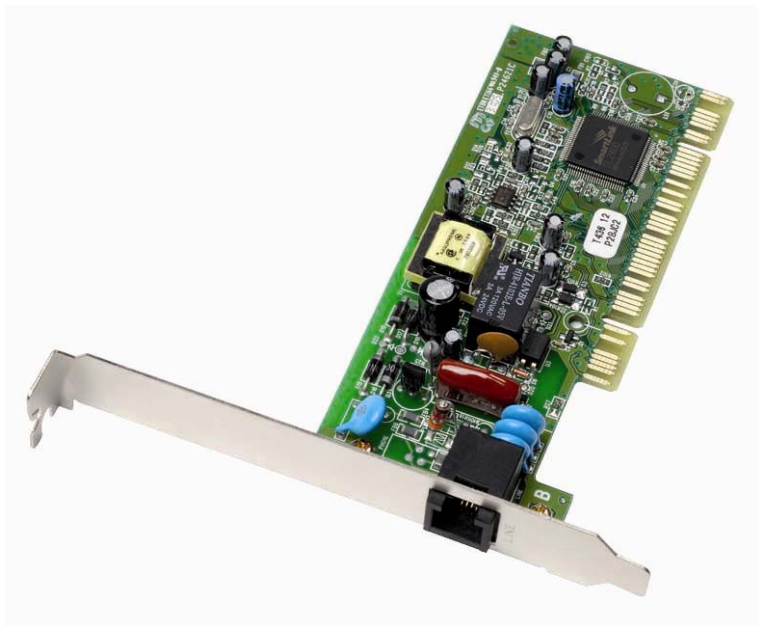

USER MANUAL

A01-PP3R_ME01

Where solutions begin



ITALIANO

Questo prodotto è coperto da garanzia Atlantis Land **On Site** della durata di 3 anni. Per maggiori dettagli in merito o per accedere alla documentazione completa in Italiano fare riferimento al sito www.atlantis-land.com.

ENGLISH

This product is covered by Atlantis Land 3 years **On Site** warranty. For more detailed informations please refer to the web site www.atlantis-land.com.

For more detailed instructions on configuring and using this device, please refer to the online manual.

FRANCAIS

Ce produit est couvert par une garantie Atlantis Land **On Site** de 3 ans. Pour des informations plus détaillées, référez-vous svp au site Web www.atlantis-land.com.

DEUTSCH

Dieses Produkt ist durch die Atlantis Land 3 Jahre **On Site** Garantie gedeckt. Für weitere Informationen, beziehen Sie sich bitte auf Web Site www.atlantis-land.com.

ESPAÑOL

Este producto está cubierto de garantía Atlantis Land **On Site** por 3 años. Para una información más detallada, se refiera por favor al Web site www.atlantis-land.com.

Where solutions begin



The award of the information is facultative, but its lack will prevent ATLANTIS LAND® from starting the Guarantee process requested.



Register your product!

www.atlantis-land.com

Registration on the web site **www.atlantis-land.com** within 15 days from the purchase of the product dismiss the customer from showing a valid proof of purchase (Sale Receipt or Invoice) in case of the request of intervention. For further information we invite you to look at our web site at the section WARRANTY.

Copyright

The Atlantis Land logo is a registered trademark of Atlantis Land SpA. All other names mentioned may be trademarks or registered trademarks of their respective owners. Subject to change without notice. No liability for technical errors and/or omissions.

Where solutions begin



SUMMARY

1.1 Introduction	6
1.2 Package Contents	6
1.3 Technical Features	6
1.4 Hardware Requirements.....	7
1.5 Software Installation	7
1.6 Driver Installation	8
1.7 Advanced Configuration	8
1.8 How to Verify Installation	9
1.9 Uninstallation	9
1.10 Product Support.....	10

A01-PP3R_ME01(V1.0 June 2006)



1.1 Introduction

Congratulations on your purchase of this Data/Fax/Voice modem. This modem features the latest innovations in high-speed modem design, making electronic communication faster and easier. This Quick Start guide will show you how to install and properly use the modem in order to take full advantage of its features. Because of the simplicity of the modem design, the time to market is quick and less overhead. With this modem, all future driver releases will be a simple software update.

1.2 Package Contents

The product package comes with the following accessories:

- Web Runner PCI
- CR Rom with drivers, utility and manuals
- One RJ-11 telephone cable

1.3 Technical Features

- Support V.92 (up to 56 Kbps download, 48 Kbps upload)
- Modem on Hold (V.92) and Quick Connect (V.92)
- Data Compression V.44/V.42 bis/MNP 5
- Plug and Play 98/98SE/ME/2000/XP
- Fax Group 3, Class 1 (14.400 bps)
- V.80/H.324
- Error Correction V.42/MNP 2-4


1.4 Hardware Requirements

Before modem installation, verify minimum hardware requirements that your PC must have to work correctly with this product.

- Personal Computer Pentium 233Mhz (or above)
- 64MB Ram
- Slot PCI V2.1/ 2.2
- CD Rom
- SO Windows 98/ME/2000/XP
- 10MB on HD

1.5 Software Installation

1. Turn off the system and unplug your system from the power supply.
2. Remove the system cover. Refer to your housing manual for instructions.
3. Locate an empty PCI slot on the system board.

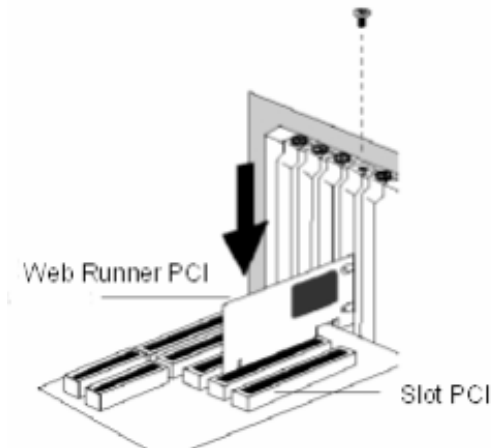



4. Check your modem card model.
5. Plug the telephone cable into the LINE jack located at the front of the bracket. Plug the other end of the telephone cable into a telephone line jack.
6. Turn your computer on.

1.6 Driver Installation

For Windows XP Users

After PC restart, the operating system provide to the automatic recognizement of the product.

Then, insert CD-ROM and launch SETUP.EXE (present in the folder "CDRom:\Driver\SO\setup.exe") for automatic drivers and utility updates. Please follow the instruction to complete installation.

For Windows 2000/Me/98 Users

After PC restart, operating system provide to recognize a new "Pci Device".

During installation, select the folder in the CD content product's driver.

NOTE: For operating system Windows 2000, will be show a warning screen that inform you that driver aren't electronically signed "Windows Logo".

Press "Yes" to complete installation.

1.7 Advanced Configuration

To change the country setting and activate V.92 protocol, follow these steps:

1. Click "**Start > Settings > Control Panel > Modem Settings**"
2. Select the required country from the list.



3. Click "Ok".
4. Click "**Start > Settings > Control Panel > V.92**".
5. Select **Quick Connection** and **V.44**.
6. Click "Ok".

1.8 How to Verify Installation

To verify that the modem is installed correctly, follow these steps:

1. Click "**Start > Settings > Control Panel > Phone and modem options**": check for the presence of a "**Smart Link 56K Modem**".
2. In "**Control Panel > Phone and modem options > Modems > Properties > Diagnostics**" click on "**Query Modem**" button and check that the modem responds.

1.9 Uninstallation

To unistall modem, please see the following instruction:

1. To uninstall the Configuration Utility and Driver, go to the **Control Panel** of your system.
2. Open the **Add/Remove Programs**.
3. Select and double click on the **Smart Link 56K Voice Modem** in the Add/Remove Programs Properties.
4. Follow the on screen instructions to unistallation the Configuration Utility.

1.10 Product Support

If you have any problems with the modem WebRunner PCI, please consult this manual. If you continue to have problems you should contact the dealer where you bought this device. If you have any other questions you can contact the Atlantis Land company directly at the following address:

Atlantis Land SpA

Viale De Gasperi, 122

20017 Mazzo di Rho(MI)

Tel: +39. 02.93906085, +39. 02.93907634(help desk)

Fax: +39. 02.93906161

Email: info@atlantis-land.com or tecnicisti@atlantis-land.com

WWW: <http://www.atlantis-land.com>

Atlantis Land S.p.A.
Viale De Gasperi, 122
Mazzo di Rho – MI – Italy
info@atlantis-land.com
sales@atlantis-land.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>